Document Version 2.0 | APRIL 2023





White



Black

LOGICflex X-EU

The Lively Jetsetter.

DESCRIPTION

Our lively jetsetter combines a variety of prized assets from the whole family, including cutting-edge DYNAMIC MOTION and ISP technologies. Ultimate protection, performance and outstanding rounded edge design: delivered as standard.


FEATURES

- Unique leg shaping and design
- Clean, crisp design
- Intelligent System Protection
- 4 integrated sensors
- Brushless motor technology
- Plug & Play technology
- Simple & fast set up
- Compact & e-Commerce designed packaging
- Made in EU

Contact Headquarters
LOGICDATA Electronic & Software Entwicklungs GmbH
Wirtschaftspark 18, 8530 Deutschlandsberg, office.at@logicdata.net

North America
LOGICDATA North America Inc., 5300 Broadmoor Ave SE,
Suite D, Grand Rapids, MI 49512, USA, office.na@logicdata.net

LOGICDATA
MOTION FOR YOUR LIFE

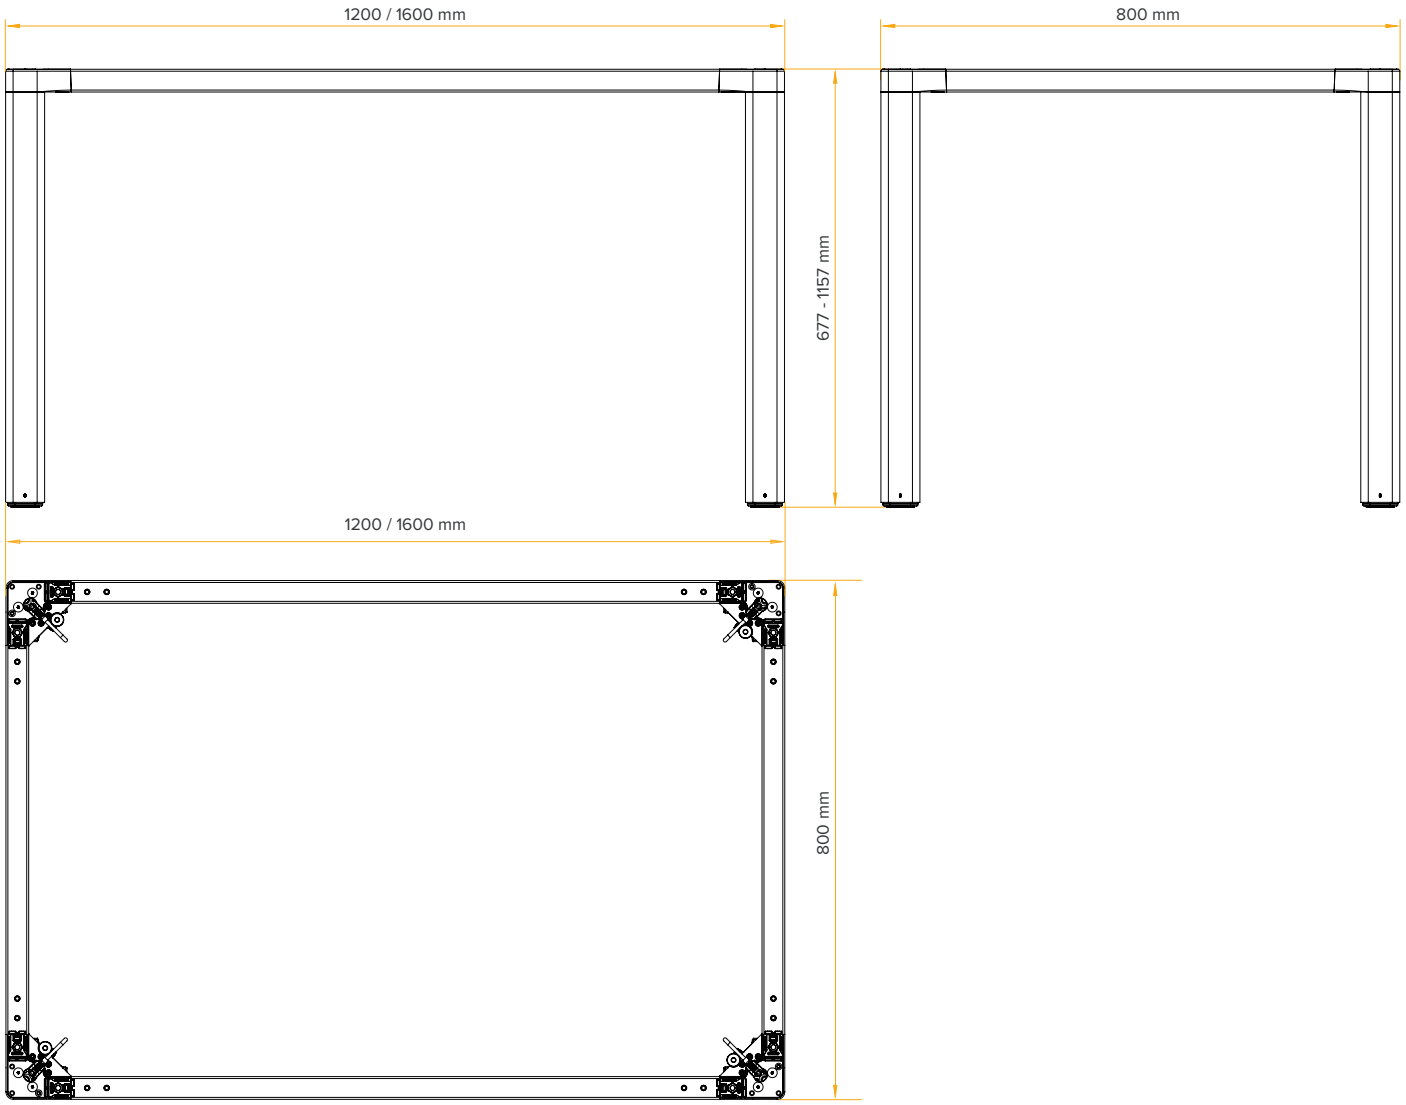


TECHNICAL DATA

Frame size	1600 mm x 800 mm | 1200 mm x 800 mm
Travel range (without tabletop)	677 mm (± 13 mm) to 1157 mm (± 13 mm)
Stroke	480 mm
Adjustment speed	38 mm/s (24 mm/s reduced speed)
Lifting capacity (without tabletop)	100 kg
Max. load	170 kg*
Input rating	220-240 VAC, 3,5 A
Duty cycle	2 min. ON / 18 min. OFF

LOGICDATA
MOTION FOR YOUR LIFE

Max. product weight	29,5 kg
Max. leg package weight	22,9 kg
Max. frame package weight	8 kg
Leg package dimensions (mm)	800 x 360 x 135
Frame package dimensions (mm)	1500 x 140 x 55 | 1370 x 140 x 55
Available Colors	Black non-structured, White non-structured
Ambient conditions during transport and storage	Temperature between -35°C and 80°C Temperature over 50°C only for periods not exceeding 72h Maximum relative humidity between 95% and 5% (lower allowed)
Ambient conditions during operation	+5°C to +40°C at max. 68% relative air humidity (non-condensing), up to an altitude of 2000 m.
Applied standards	EN ISO 12100 | DIN EN ISO 13854 | EN 60335-1 | EN 527-1 | EN 527-2 | EN 62233 | EN IEC 61000-6-1 | EN 61000-6-3 | EN 61000-3-2 | EN 61000-3-3 | ISO 13849-1 | ISO 13849-2, PLb | AfPS GS 2019:01 - PAH
Order code	Example: LOGICflex-X1-EU-WHT-LDS-00 LOGICflex-A0-BB-CCC-DDD-00

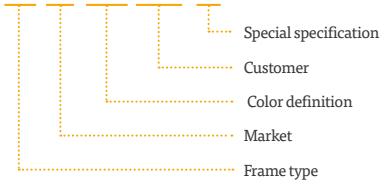

*Up to 170 kg with certain configuration