JCFS35 Foot switch

JCFS35 is suitable for Medical treatment and Industry.The unique strip texture structure of JCFS35 not only has the anti-slip effect, but also enhances the overall rigidity of the product.



General Features


IP grade:	Max. IPX6
Number of button:	Max. 2 rows button
Drive up:	2 actuators simultaneously
Colour:	Black
Control boxr matching:	Adapt to all conventional controllers of JIECANG
Operation:	Singular action or linkage action
Design:	Waterproof design

Usage


Operating Temperature:	+5 °C to +40°C
Storage Temperature:	-10°C to 50°C
Relative Humidity:	20% to 80%, non-condensing
Atmospheric Pressure:	860 to 1060 hPa
Altitude:	Max. 2000m

Dimension Drawing

One row

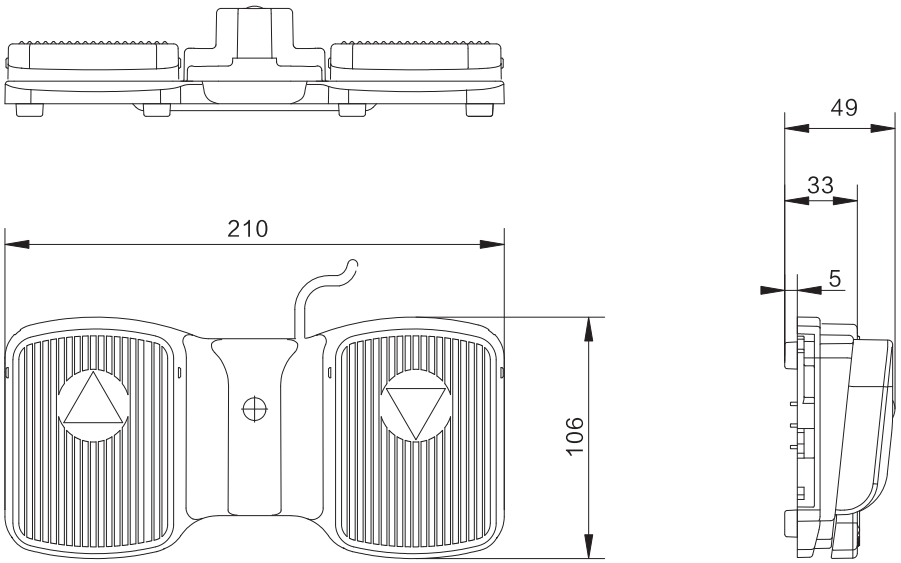

Two rows

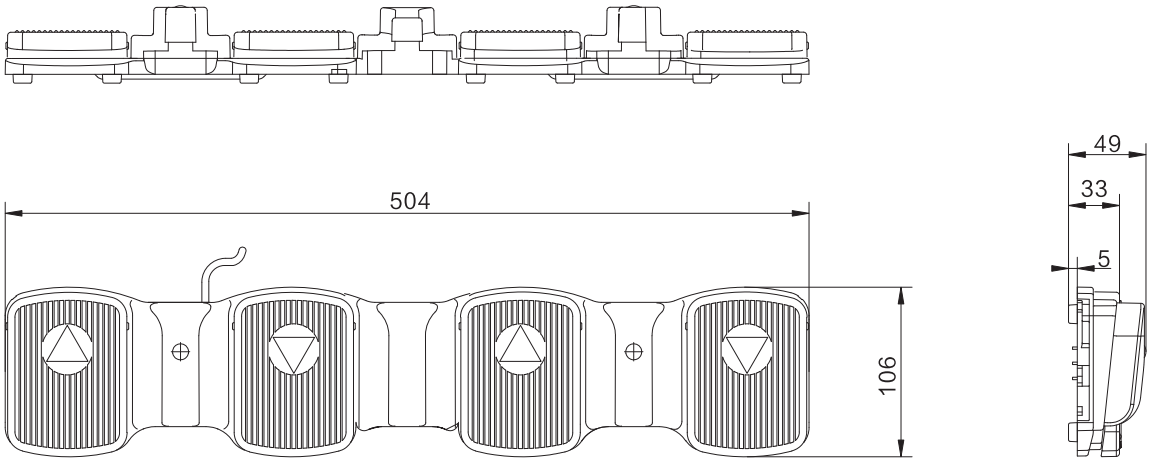


Ordering Examples


Take **JCFS35B2B08L14D00** for example

Model	**JCFS35**	
Extension features	**X**	A/B = with backlight A without backlight, B (This product is without blacklight)
Button row	**X**	2 = 2row rows
Color	**X**	B = Black / G = Gray
Panel code	**X**	M = specified code
Plug and cable	**XXX**	8L1 = 8pin Din plug coiled cable 13L1 = 13 pin Din plug coiled cable 10P1 = 10 pin crystal bending plug coiled cable
Power or capacity	**XXX**	3D0 = 3m
Optional features	**X**	0 = Single action L = Linkage action


Plug


8 pin DIN plug: straight cable:8D1, coiled cable:8L1(suitable for Jiecang straight plug control box)







13pin Din plug:straight cable:13D1, coiled cable:13L1(suitable for Jiecang straight plug control box)





10pin crystal bending plug:straight cable:10H1, coiled cable:10P1
(suitable for Jiecang's JCB35T2、JCB35T3、JCB35T6 series bending plug control box)





Attention: The number of matching push rods is different, and the matching control box model is different, and the plug code will be different. Please contact the salesman in the corresponding area of Jiecang for confirmation before placing an order.

Installation Method

Method 1:


External (place the foot switch directly on the ground near the device).

Method 2:

1) Place the single-control foot switch on the fixed frame;


2) Use M5 screws to tighten from the back of the fixing frame (thickness 20mm), the number of screws is 4 each;

The recommended torque is 0.6Nm±0.1.

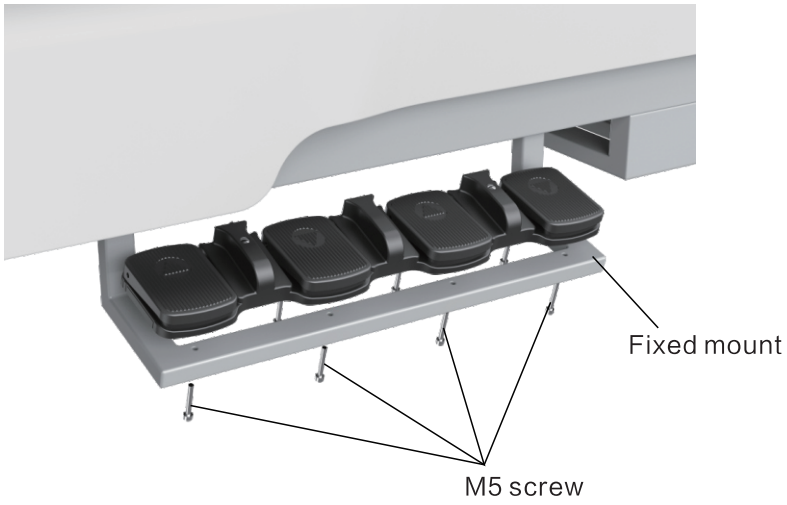


Dimensions Of Mounting Holes

One controller

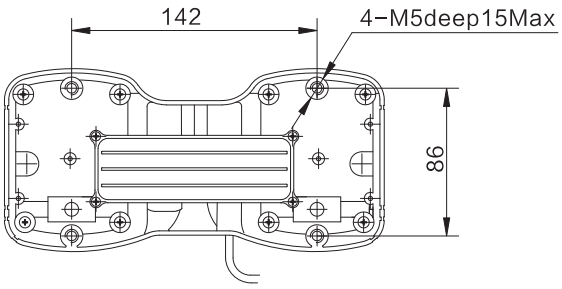

Two controller

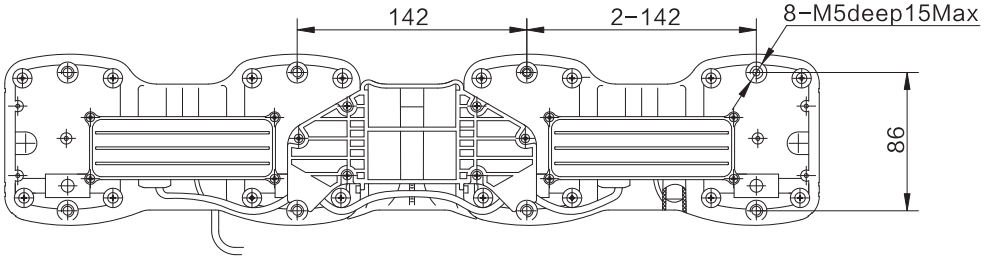

Strictly abiding by medical safety certifications

Passed EMC tests. To ensure our products pass all kinds of tests domestic or abroad.

Communication protocol development

Aiming at different applications, develop more extensive functions for control system.

Professional customization

Powerful R&D strength, fully satisfy customers' needs. Development cycle is about 10 days, seizing more market opportunities

Intelligent Control of Bluetooth

Mobile phone as the remote, applying in home care. Market pioneer, Jiecang provides better choices

Wireless Communication

Controllers adopt high-frequency wireless system. It can avoid interference mixing with signal receivers, assisting in remote control over medical equipment.

Latest Weighing System

Designed for physiotherapy beds and medical care beds. Cantilever carrying weighing sensor, it is applicable to different bedsteads dispensing with any adjustment

Disclaimer and Exclusion of Liability

The user must determine the suitability of JIECANG products under specific conditions. JIECANG is committed to providing the latest product information. However, as JIECANG' s product are constantly improving, it is possible to make changes to JIECANG' s product without prior notice. Therefore, JIECANG cannot guarantee the correctness and authenticity of the product information. Although JIECANG will do its best to meet the order requirements, due to the above reasons, JIECANG cannot guarantee the delivery capacity of any specific product.

Therefore, JIECANG reserves the right to stop selling any products listed on the website or product catalog or other JIECANG written materials. All sales activities must be carried out in accordance with the requirements of JIECANG sales and Delivery Standard Clauses. For copies of relevant documents, please contact JIECANG.

Notes for mounting and usage can be found in the corresponding mounting manual

TECHNOLOGY
DRIVES INTELLIGENT LIFE