www.jiecang.com

JIECANG

# JC35SZJ1
# Dressing table lifting system



TECHNOLOGY
DRIVES INTELLIGENT LIFE

JIECANG

Date Sheet

# JC35SZJ1

- Simple appearance, compact internal structure, excellent comprehensive performance, low noise, high load capacity, and high stability.
- Suitable for use in environments such as dressing tables and lift cabinets.





Remote control:
JCHR35C6



Hand controller:
JCHT35K9

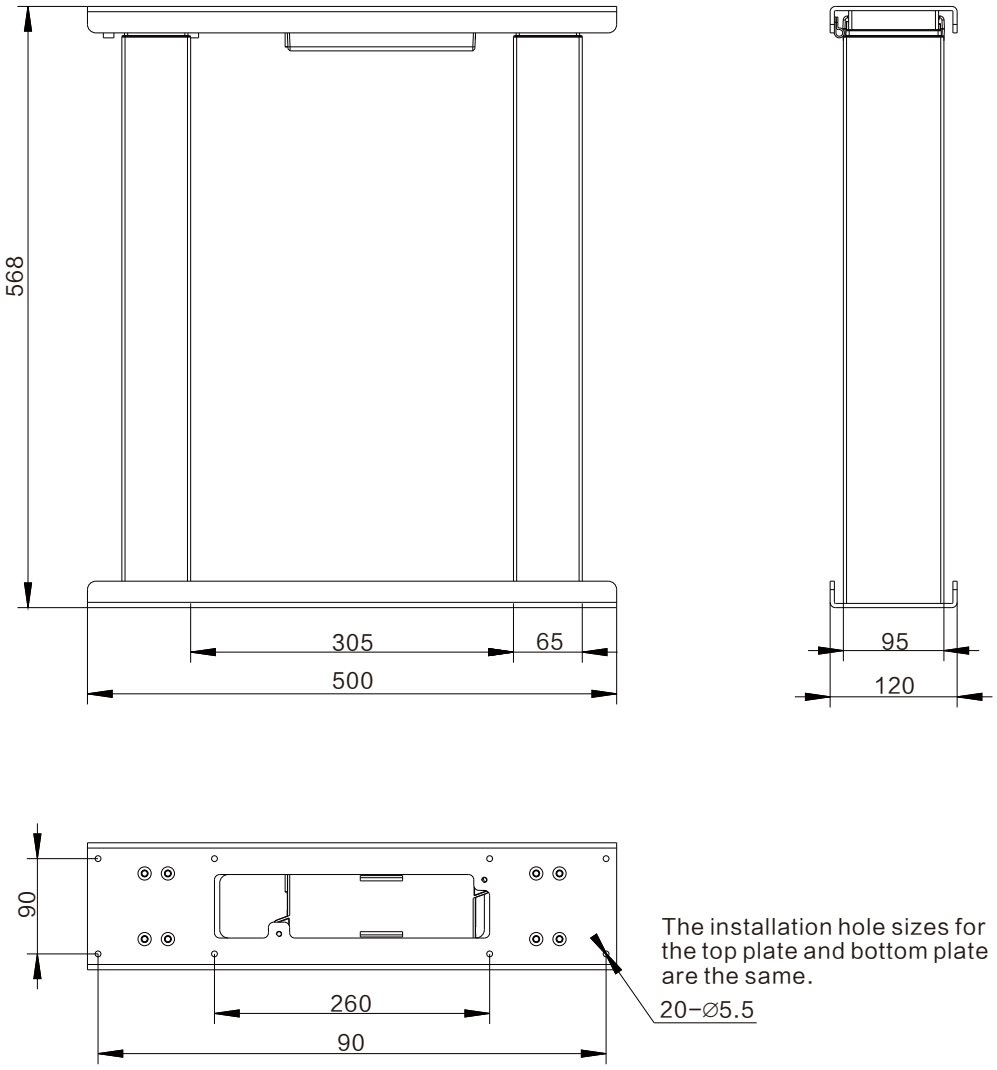
## Technical Specifications

- Color: White
- Input Voltage: 220VAC
- Load in Push: 500N
- No-Load Speed: 25mm/s
- Load Speed: 25mm/s
- Self-Locking Force: >500N
- Stroke length/Installation Dimensions: 650mm/570mm
- Noise Level: <50dB
- Protection Class: IP44

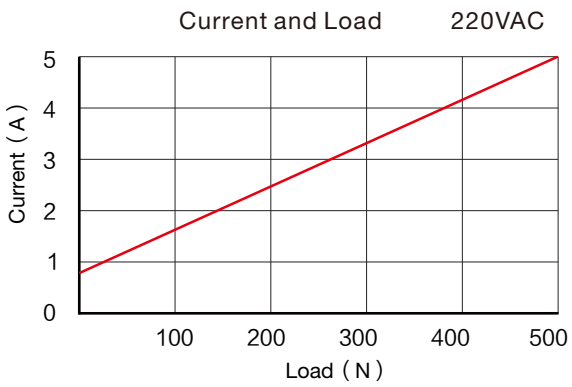
## Usage

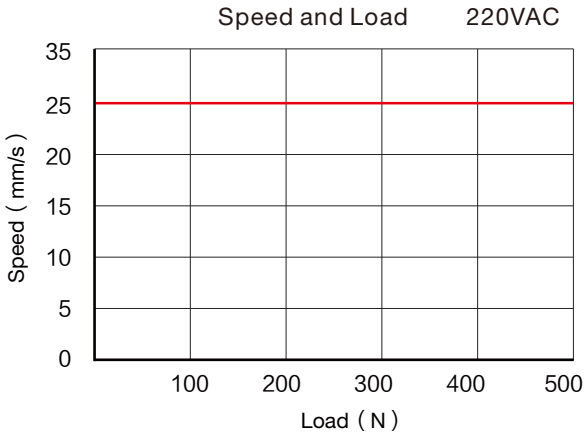
- Duty Cycle:10%, max. continuous work for 2min. and 18 min. off
- Static Bending Moment: Lateral loads are not permitted.
- Ambient Temperature: -10 to +70°C.
- Installation Direction: Motor top.
- Limit Switch Type: Built-in switch.

## Dimension


568
305
65
500
95
120
90
260
90
The installation hole sizes for the top plate and bottom plate are the same.
20−∅5.5

## Characteristic curve




## Ordering example

JC35SZJ1−3 − S − 650/570 − 0 − H − 0

- Special specifications
- Color: White
- Shape of spacers and welding position
- Installation Dimensions
- Stroke length
- Forward installation
- Number of column sections
- JC35SZJ1

## Disclaimer and Exclusion of Liability

The user must determine the suitability of JIECANG products under specific conditions. JIECANG is committed to providing the latest product information. However, as JIECANG’ s product are constantly improving, it is possible to make changes to JIECANG’ s product without prior notice.Therefore,JIECANG cannot guarantee the correctness and authenticity of the product information. Although JIECANG will do its best to meet the order requirements, due to the above reasons, JIECANG cannot guarantee the delivery capacity of any specific product. Therefore, JIECANG reserves the right to stop selling any products listed on the website or product catalog or other JIECANG written materials. All sales activities must be carried out in accordance with the requirements of JIECANG sales and Delivery Standard Clauses. For copies of relevant documents, please contact JIECANG.